


Desso Textile floor covering - Tiles

Axminster Carpet Tile 9 Row - Cushion Back

Preliminary specification according to EN 1307



Type of manufacture	ISO 2424	Woven - Axminster						
Aspect	ISO 2424	Cut pile						
Dye method		Hank dyed						
Dimensions	EN 994	cm x cm	91,4 x 91,4 / 36,0" x 36,0"					
Primary backing	ISO 2424	Polypropylene weft / Polyester-based warp						
Secondary backing	ISO 2424	Cushion Back						
Pile fibre composition	ISO 2424	80% wool - 20% polyamide						
Total thickness	ISO 1765	mm	16.5	inch	0.6			
Effective pile thickness	ISO 1766	mm	7.0	inch	0.28			
Total mass	ISO 8543	g/m ²	5100	oz/yd ²	150.5			
Total pile mass	ISO 2424	g/m ²	1490	oz/yd ²	44.0			
Effective pile mass	ISO 8543	g/m ²	1015	oz/yd ²	30.0			
Pile density	ISO 8543	g/cm ³	0.145	lb/in ³	0.0052			
Number of tufts	ISO 1763	/dm ²	975	/yd ²	81520			
Stroll test	ISO 6356	kV	-					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307	33 Commercial - heavy use						
Luxury rating	EN 1307	LC 5						
Dimensional stability	EN 986	%	≤ 0,2					
Impact sound reduction ΔL_w	ISO 10140	dB	-					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α_s	-	-	-	-	-	-
Noise reduction	ISO 354	α_w	-					
Thermal resistance	ISO 8302	m ² .K/W	0.146					
Flammability	EN 13501-1	Cfl - s1 (loose laid tested)						
Prodis - GUT	www.pro-dis.info	-						




EN 14041
0493-CPR-0106

Supplied by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk

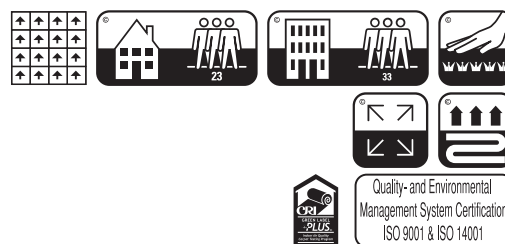

Desso flooring products are to be installed in full accordance with Desso's installation instructions and recognised trade standards. An effective, regular cleaning and maintenance programme is vital for retaining a high appearance level. Desso flooring products should only be used as floorcoverings. Note: Desso reserves the right to amend this specification without giving prior notice. For the latest versions of the technical specifications, visit www.desso.com

EN-20150929